
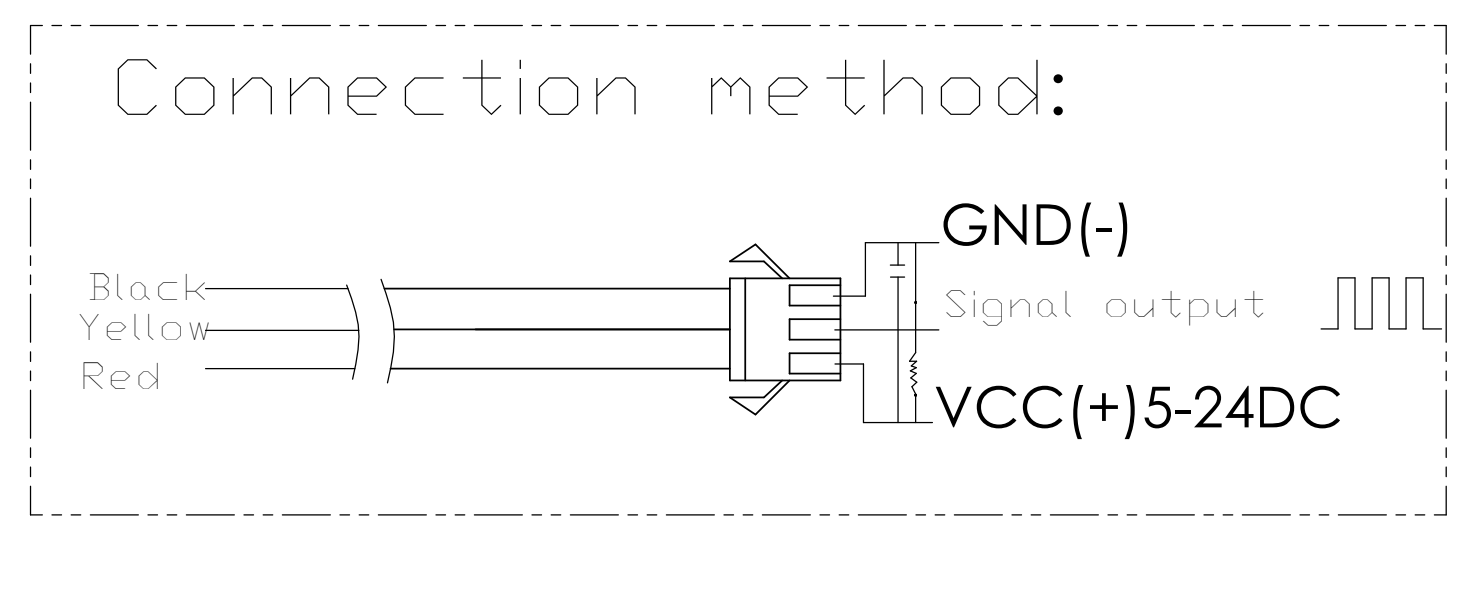


Flow-Pulse	Flow-Curve	Connection method
------------	------------	-------------------


—Flow Range:100L/H-/1800H-L/H

Flow (L/H)	Frezq.(HZ)	Erro range
120L/H	16	±10
240L/H	32.5	
360L/H	49.3	
480L/H	65.5	
600L/H	82	
720L/H	90.2	

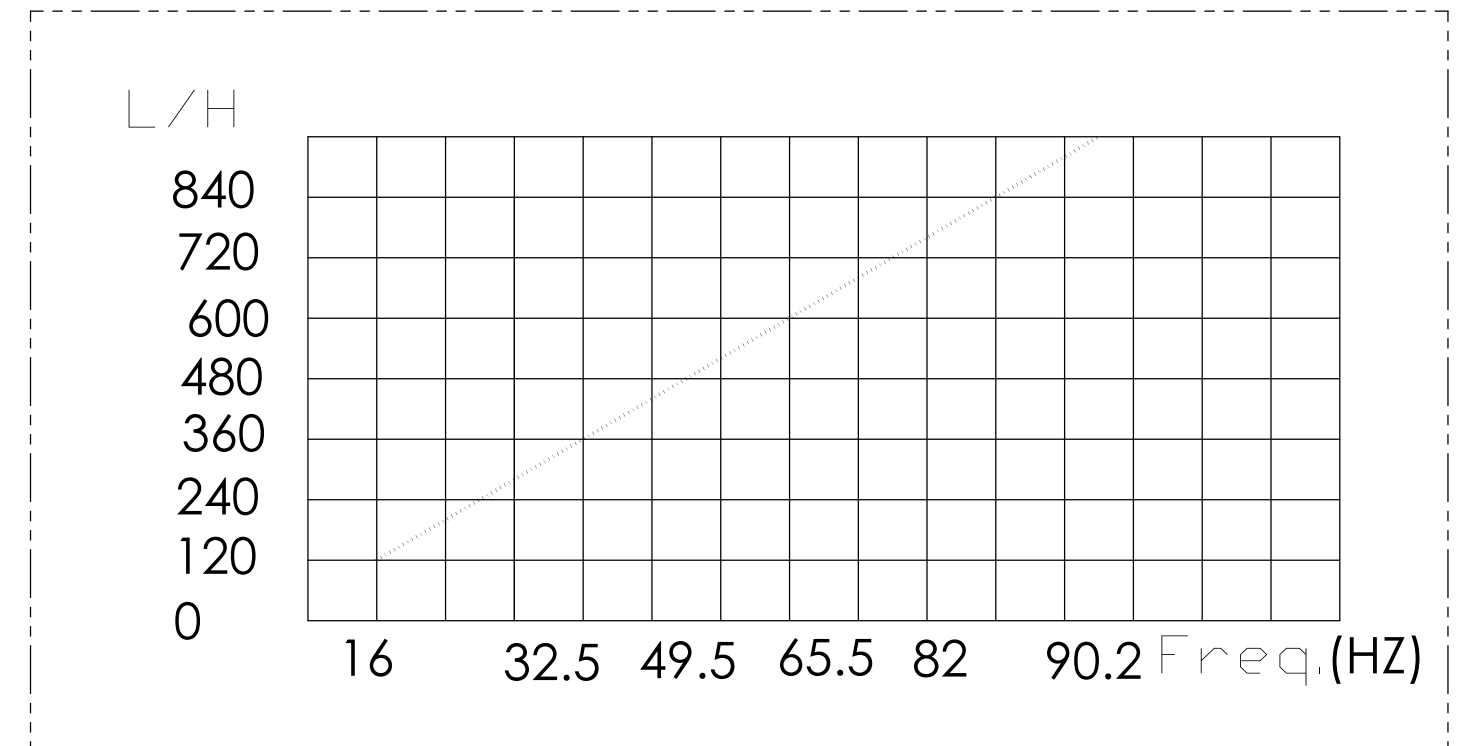

YIFA the plastics Ltd Prodcut Introduction

- 1.Modle:YF-21
- 2.Product Name:Hall sensor
- 3.Flow Range: 1-30L/MIN
- 4.(1)Connection Method

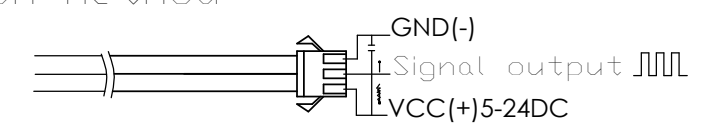

- (2)Voltage Range 3.5-24VDC, Pulse Characteristic:F=7Q(L/MIN).
- (3)Extent of error:±5%.
- (4)Flow-Pulse
2L/MIN=16HZ 4L/MIN=32.5HZ 6L/MIN=49.3HZ
8L/MIN=65.5HZ 10L/MIN=82HZ

5.Bom

No.	Item	Material	Qty.
1	Connection wire		1
2	Bonnet	PA	1
3	Screw		4
4	Valve body	PA	1
5	Leak press valve		1
6	Magnet		1
7	Hall		1
8	Impeller	POM	1
9	Rustless steel axis	SUS304	1
10			
11			

